

LOL-DOW-7002

Model No	LOL-DOW-7002
Application	Downlight
Name	Simple recessed ceiling LED
Description	<p>The LOL-DOW-7002 is a discrete and clever lighting solution for places where only the light and nothing else is required. It is suitable for indoor wet area zones or covered indoor/outdoor spaces. It is designed to be installed in plasterboard ceilings and requires a minimum clearance of 35mm behind the ceiling surface, including the thickness to the plaster. It is supplied with the all the correct installation elements including screws, timber mounts, foam strips and rubber protective seal to protect the LEDs while plastering and painting around the assembly.</p>
Power Input	24V
Lamp details	LED Module
Power Usage	4W per LED, 8W per LED
Beam Angles	24, 36, 80
Colour Temperature	2700k, 3000k
Lumen	395 lm, 420 lm, 790 lm, 840 lm, per LED
CRI	90+
Dimming System	Call to discuss
IP	IP44
Finish	As shown
Mounting	
Dimensions	Type 1: 52L x 11W, Type 2: 150L x 11W, Rebate depth: 35D
Product Notes	

General Notes

Please contact Light on Landscape to confirm the availability and current specifications of this luminaire.

Installation

Light on Landscape strongly recommend that all luminaires be correctly installed and maintained. Failure to do so will result in the voiding of the manufacturer's warranty and the reduced efficiency, performance and life of the fixture. To eliminate voltage drop, we advise that the recommended UV stabilized cable and run lengths are used, along with soldered joins, heat shrink connectors and quality lamps.



Type 1




Type 2




Installed



Type 1 before installation

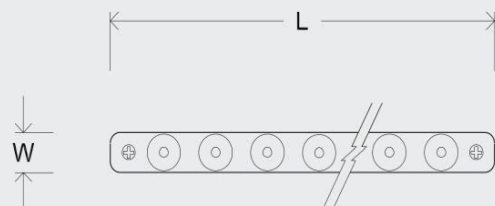

Visible LED in slot after installation

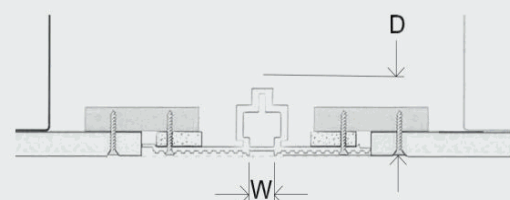

Section diagram of installed light fixture