

LOL-LIN-1077




Model No	LOL-LIN-1077
Application	Linear
Name	IP67 black 3D flex
Description	The LOL-LIN-1077 can be installed on ceilings, in walls or in concrete floors or timber decks. The LOL-LIN-1077 is great for providing a grazing light on textured walls; straight or curved; columns or piers.
Power Input	24V DC
Lamp details	LED Module
Power Usage	22W / M
Beam Angles	Wide
Colour Temperature	3000k
Lumen	2300 / M
CRI	85+
Dimming System	Call to discuss
IP	IP67
Finish	Black
Mounting	Rebated*
Dimensions	Strip: 14W x 14H x 168 Cut Length x 1000 or 3000 Total Length, Flex Bracket: 16.2W x 19H, Bracket: 19W x 18H
Product Notes	*Refer to manufacturer's installation illustrations. Too avoid voiding warranty, manufacturer's instructions must be followed. ** Remote driver purchased separately. Light On Landscape to advise.
IP68 Joining Kit	YES

General Notes

Please contact Light on Landscape to confirm the availability and current specifications of this luminaire.


Installation

Light on Landscape strongly recommend that all luminaires be correctly installed and maintained. Failure to do so will result in the voiding of the manufacturer's warranty and the reduced efficiency, performance and life of the fixture. To eliminate voltage drop, we advise that the recommended UV stabilized cable and run lengths are used, along with soldered joins, heat shrink connectors and quality lamps.

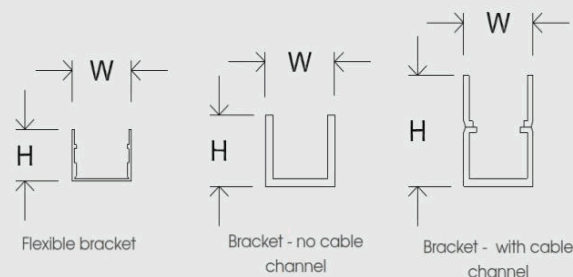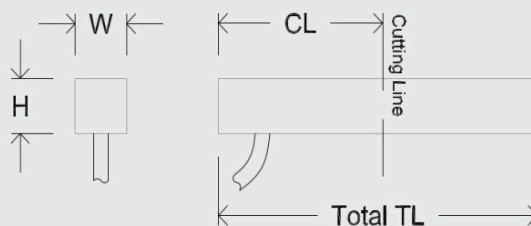


Flexible bracket for 3D curves

Linear installation



Using bracket with cable channel



Using extrusion with no cable channel