

LOL-WAL-1023

Model No	LOL-WAL-1023
Application	Wall
Name	Low Profile Downlight
Description	Australian designed the LOL-WAL-1023 comes with a UV stabilized frosted acrylic diffuser and a double insulated exterior rated pre fitted cable 500mm long.
Power Input	24V DC Constant, Remote Drivers Required
Lamp details	LED Module
Power Usage	Type 1 - 1W, Type 2 - 5W
Beam Angles	
Colour Temperature	2700k
Lumen	Type 1 110 lm, Type 2 550 lm
CRI	90+
Dimming System	DALI Interface
IP	IP54
Finish	Black, White, Aged Brass, Brushed Brass
Mounting	Surface Mount with propriety mounting system
Dimensions	Type 1: 75W x 75H x 12D, Type 2: 250W x 75H x 13D
Product Notes	Can only be used in downward pointing position.

General Notes


Please contact Light on Landscape to confirm the availability and current specifications of this luminaire.

Installation

Light on Landscape strongly recommend that all luminaires be correctly installed and maintained. Failure to do so will result in the voiding of the manufacturer's warranty and the reduced efficiency, performance and life of the fixture. To eliminate voltage drop, we advise that the recommended UV stabilized cable and run lengths are used, along with soldered joins, heat shrink connectors and quality lamps.



Type 1

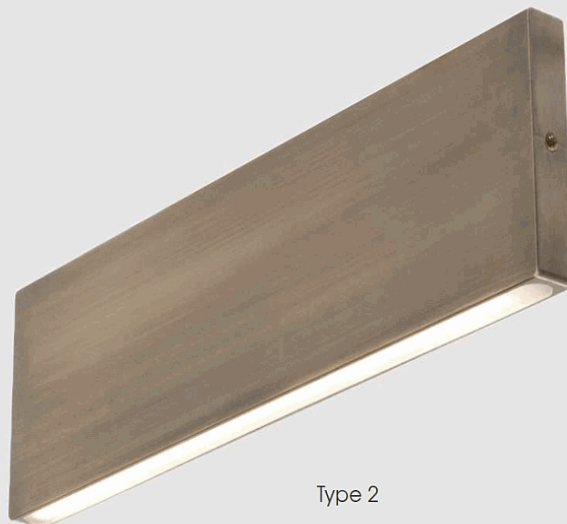

Type 2

